

PERFORMANCE REPORT



CS-PFR-15-6 Cuttings Handling Improvements

Work scope - Augean North Sea Service (ANSS) were awarded the Contract for the Provision of Cuttings Containment and Disposal Services on July 2015.

History - ANSS were briefed that the incumbent system on-board the Paragon B391 had limited drilling progress to 500ft per day and was also labour intensive, so ANSS were asked to review and provide improvement options.

Solution – ANSS conducted a detailed rig survey put forward a proposal that would increase the skip loading station by 100% to a 4 skip configuration and would also increase the height of the augers and allow the introduction of directional discharge chutes to greatly reduce manual handling. This was approved and the enhancements were carried out in a safe and timely manner without incident or impact to online rig time.

Result – 4 x skips can be available at the skip load station increasing efficiency and manual handling of drill cuttings at the discharge chutes is no longer required. Centrica are very happy that they issued their own HSE and Performance notes within their organisation.

Contract information

When - August 2015

Where - Paragon B391 on contract to Centrica

Equipment - 4-Bay skip loading station with directional chutes. (a Vacuum system was also installed as contingency to the auger system and for clean ups).

Environmental - No environmental incidents occurred during the survey, installation or operational skip filling that were carried out during "South York" well.

Safety - Carried out with Zero Incidents

Completion - All operations were completed within the tight time frame with no impact to online rig time.

Please refer to page two for details of the performance notes issued by Centrica.

To discuss your requirements in more detail please contact our dedicated team on:

T: +44 (0)1224 719200
aberdeensales@augeanplc.com

**WASTE.
ERASED.**

Complete waste services for the North Sea




B391 – Cuttings Handling Improvements Improves HSE and Performance

The Old System



The New System

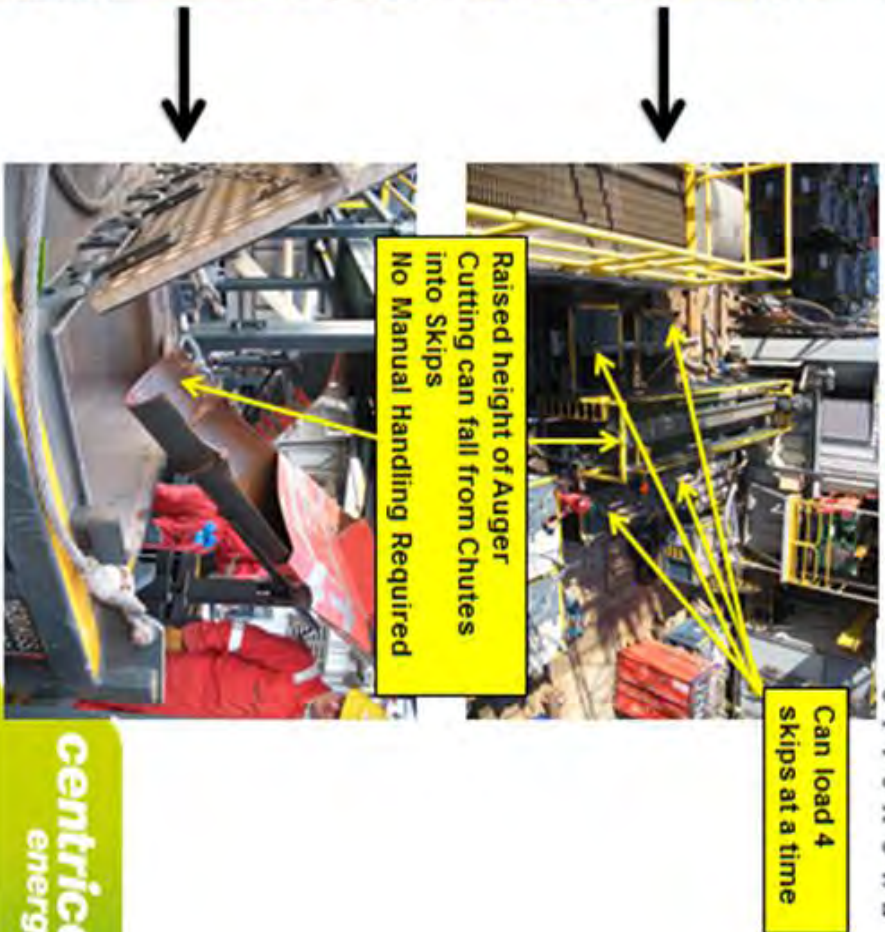

**WASTE.
ERASED.**